



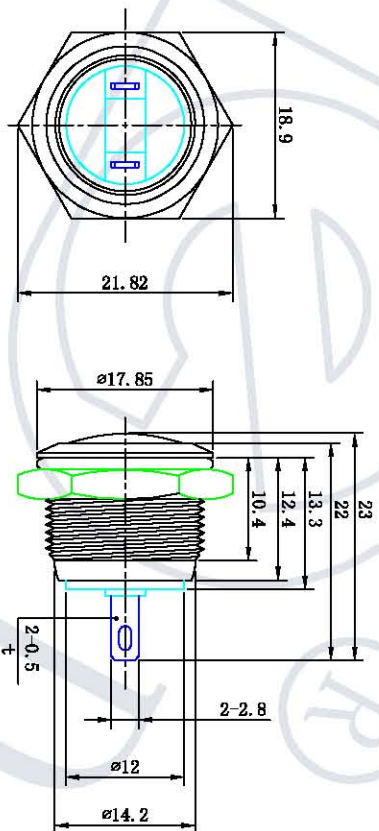


J/B91-09

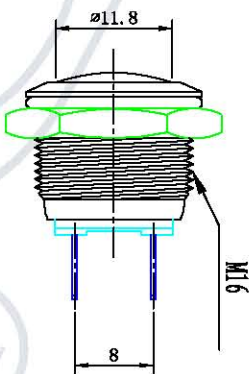

安装面板
PANEL CUT-OUT



SPECIFICATIONS

1. Contact Rating: 2A @ 36V
2. Electrical Life: 50,000 cycles
3. Contact Resistance: 50m-ohms max (initial)
4. Insulation Resistance: 1,000M-ohms min @ 500VDC
5. Dielectric Strength: 2,000V RMS 50 ~ 60Hz
6. Operating Temperature: -40° C ~ +85° C
7. Switch function: 1NO Momentary
8. IP Class: IP65 Protection
9. Torque: 5 ~ 14Nm max. applied to nut
10. Operating Force: 5N max

MATERIALS

1. Button: Stainless Steel or Copper plating chrome
2. Bushing & Bezel: Stainless steel or Copper plating chrome
3. Base: PBT
4. Contact: Silver, Gold Plated
5. Nut: Nickel plated brass

按钮开关										Yueqing Dalar Electron co., Ltd		
Push Button Switch												
标记	处数	分区	更改文件号	签字	日期	阶段标记		数量	重量	比例	GQ-16B/J	
设计			标准化									
校对								1		1.5:1		
审核												
工艺			批准									

借 (通) 用件登记
插图
插校
旧底图总号
底图总号
签字
日期