
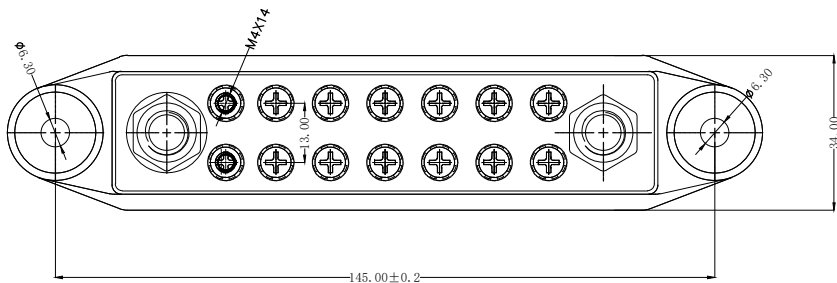




标记	日期	姓名	变更内容
△			

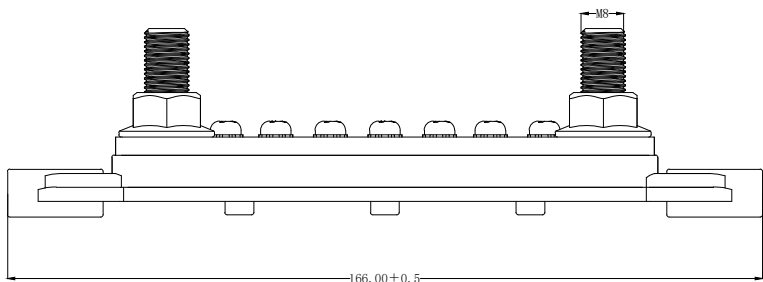

The Main Technology Performance

Item	Parameter
Continuous Rating Voltage Max	275A 300V AC/48V DC
Mounting Holes Accepts	Accepts #10 (M5) Screws
Number of Terminal Studs	2
Number of Screw Terminals	14
Terminal Type	5/16'' (M8) Stud
Base Material	UL94-V0 Rated, Glass Reinforced Thermoplastics
Bus Material	Nickel Plated Brass

名称	数量
BB-250-基座	1
BB-275A-上盖	1
M8塑料螺母	2
铜排3.5*25 (T2M8S14)	1
M8*30螺丝	2
M8螺母	2
M4*8带垫螺丝	14
M6*12大头自攻螺丝	2
Φ 20扣盖	2

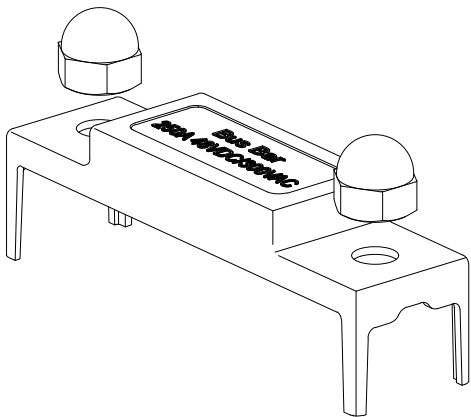

未注公差尺寸	线性尺寸	>0~6 >6~20 >20~50 >50~100 >100	±0.05 ±0.1 ±0.2 ±0.4 ±0.8	名称	型号: BUS BAR		
	角度尺寸	±2°			料号:		
	设计				模具编号	单位: MM	比例: 1: 1
	审核				版本: A1	视角: ④	
	批准				第 1 页 共 1 页		
生效时间				BB275-T2M8S14-C	乐清市戴尔电子有限公司 YUEQING DAIER ELECTRON CO., LTD		