

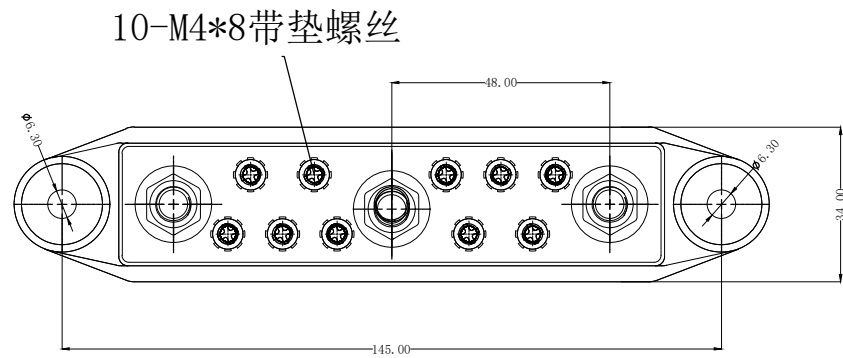


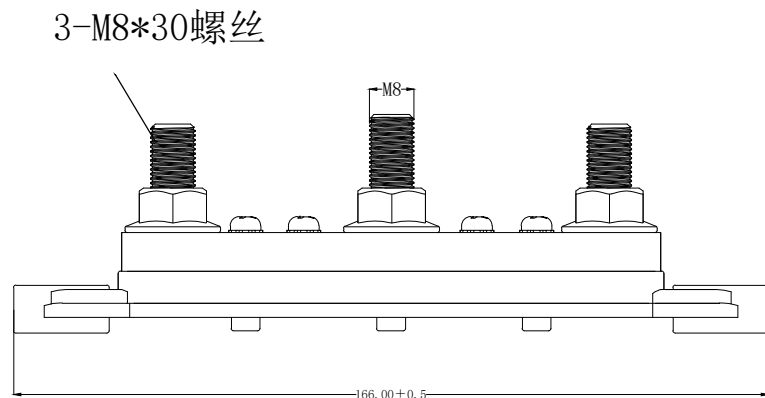


The Main Technology Performance

Item	Parameter
Continuous Rating Voltage Max	400A 300V AC/48V DC
Mounting Holes Accepts	Accepts #10 (M5) Screws
Number of Terminal Studs	3
Number of Screw Terminals	10
Terminal Type	5/16'' (M8) Stud
Base Material	UL94-V0 Rated, Glass Reinforced Thermoplastics
Bus Material	Nickel Plated Brass

标记	日期	姓名	变更内容
△			



名称	数量
BB400-T3M8S10	
BB-250-基座	1
BB-400A-上盖	1
M8塑料螺母	2
黄铜排8*25	1
M8*30螺丝	3
M4*8带垫螺丝	10
M8螺母	3
M6*12大头自攻螺丝	2
φ 20扣盖	2

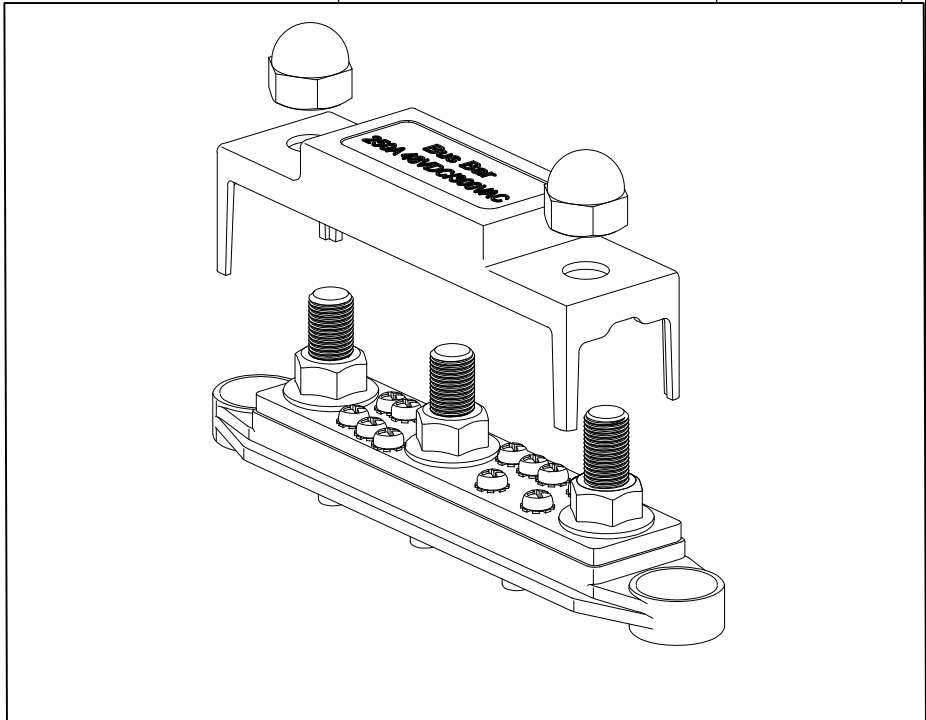

未注公差尺寸	线性尺寸	>0~6	±0.05	名称	型号: BUS BAR		
		>6~20	±0.1		料号:		
设计	角度尺寸	>20~50	±0.2	BB400-T3M8S10-C	模具编号	单位: MM	比例: 1: 1
		>50~100	±0.4		版本: A1	视角: ☉	第 1 页 共 1 页
审核		>100	±0.8				
批准			±2°				
生效时间							