
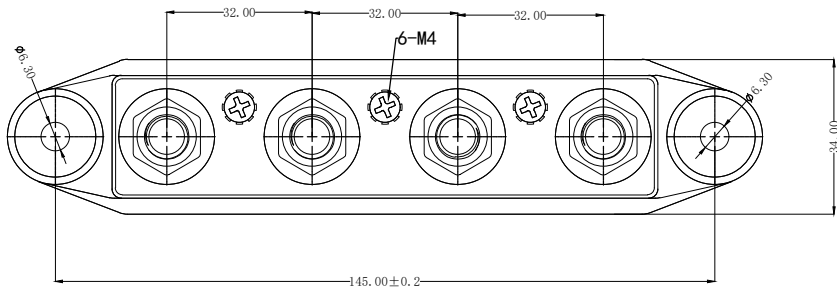




标记	日期	姓名	变更内容
△			

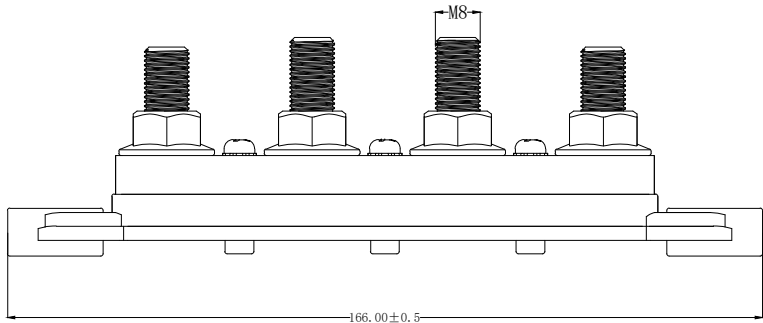

The Main Technology Performance

Item	Parameter
Continuous Rating Voltage Max	400A 300V AC/48V DC
Mounting Holes Accepts	Accepts #10 (M5) Screws
Number of Terminal Studs	4
Number of Screw Terminals	3
Terminal Type	5/16'' (M8) Stud
Base Material	UL94-V0 Rated, Glass Reinforced Thermoplastics
Bus Material	Nickel Plated Brass

名称	数量
BB-250-基座	1
BB-400A-上盖	1
M8塑料螺母	2
黄铜排8*25	1
M8*30螺丝	4
M4*8带垫螺丝	3
M8螺母	4
M6*12大头自攻螺丝	2
Φ 20扣盖	2

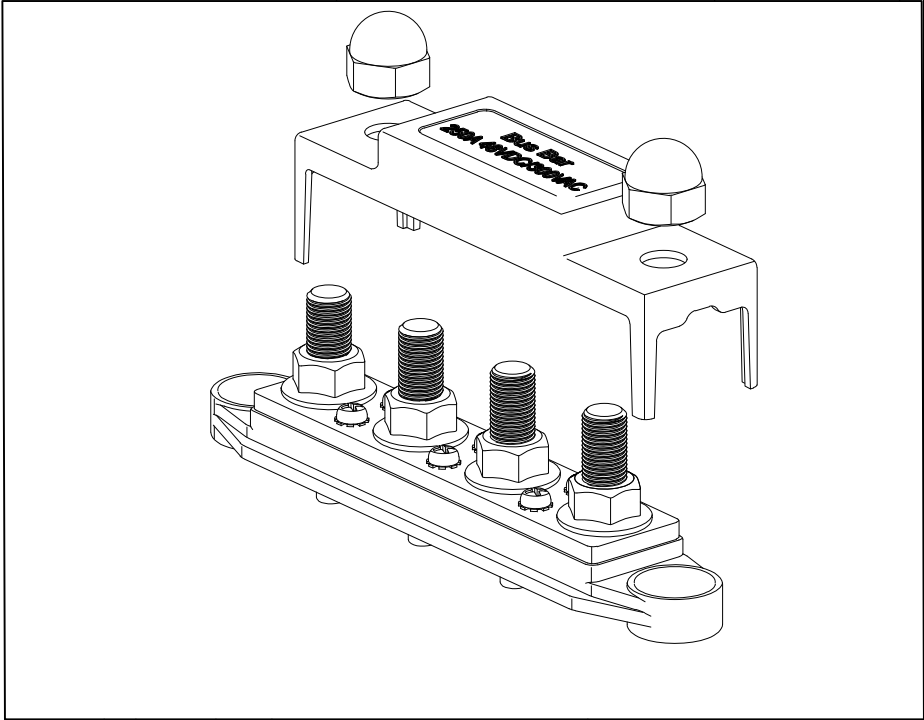

未注公差尺寸	线性尺寸	>0~6	±0.05	名称	型号: BUS BAR		
		>6~20	±0.1		料号:		
设计	角度尺寸	>20~50	±0.2	BB400-T4M8S3-C	模具	单位: MM	比例: 1: 1
		>50~100	±0.4		编号	版本: A1	视角: ④
审核		>100	±0.8		第 1 页 共 1 页		
批准					 乐清市戴尔电子有限公司 YUEQING DATER ELECTRON CO., LTD		
生效时间							