

4


3

2



1

REV	DOCUMENT	CHANGED BY	CHECK

Circuit Diagram



Mounting Hole Dimensions

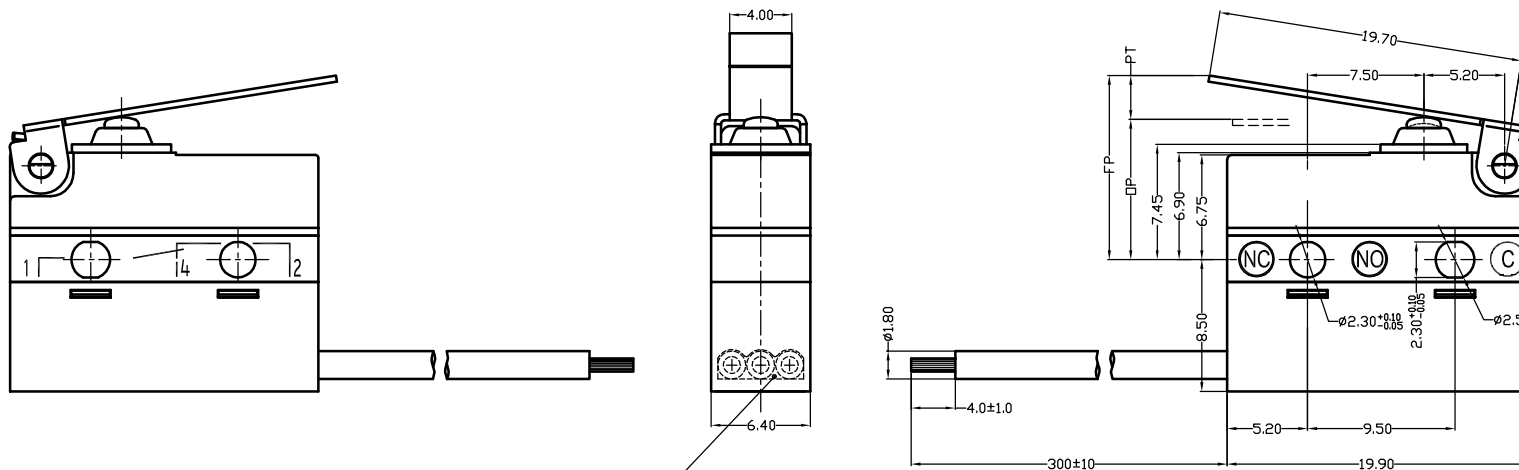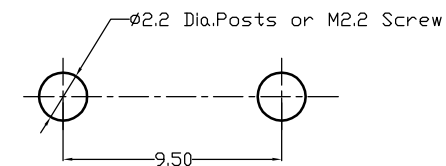

COM: UL1007 20AWG BLACK(黑色)
NO: UL1007 20AWG BLUE(蓝色)
NC: UL1007 20AWG GRAY(灰色)

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM TOLERANCES UNLESS NOTED:	TITLE			
OPERATING FORCE:	100gf MAX.	CONTACT ARRANGEMENT S.P.D.T	PROTECTION		WS1-Z7-W300R300			
RELEASE FORCE:	18gf MIN.		TERMINAL SWITCH BODY	NO PLACE X ± ±	DRAWING NAME			
OPERATING POSITION:	8.8±1.3MM.	RATING 3A 125/250VAC 48VDC 5E4 6(3)A 125/250VAC 6A 36VDC μ 40T120	IP00 IP67	ONE PLACE .X ± ±	DRAWN	Jack	APR/22-21	SIZE REV
PRE-TRAVEL:	4.8MM MAX.			TWO PLACE .XX ± ± 0.40	CHECK	Andy	APR/22-21	B A
DIFFERENTIAL TRAVEL:	0.8MM MAX.	THIRD ANGLE PROJECTION		THREE PLACE .XXX ± ±	SCALE	—	AutoCAD	SHEET
OVER-TRAVEL:	0.7MM MIN.			ANGLES X ± ± 2°	YUEQING DAIER ELECTRON CO.,LTD			
				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF DONGHAI. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF DONGHAI.				

4

3

2

1